


# Catalogue No: T2AX00M3SWA

## T2 AUXILIARY SWITCH 1C/O WIRED

Power Distribution and Protection > Circuit Breakers > Moulded Case Circuit Breakers > TemBreak2 Accessories > TemBreak 2 Internal Accessories 125 AF - 1600 AF > Auxiliary Switches T2AX



### TB2 Auxiliary Switch 1C/O Wired

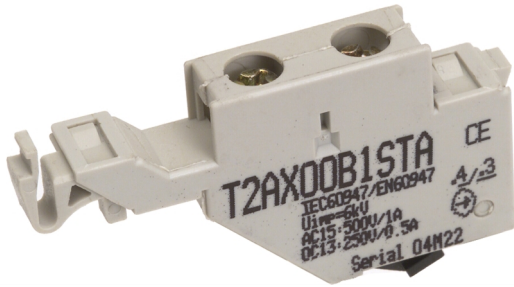

Representative Photo Only  
(actual product may vary based on configuration selections)

#### SPECIFICATIONS

Product Series	TemBreak 2 MCCB
Details, compatible product series	Heavy-duty accessory common for MCCBs 125 A to 630 A; mount on right side of MCCB
Component Type MCCB	Auxiliary Switch
Un, Nominal Operational Voltage, AC	240 V AC
Ie, Rated Operational Current, AC-15, 240V	2 A@240V
Ie, Rated Operational Current, AC-15, 440V	4 A@440V
Contact Configuration	1 CO
Colour, Body / Housing	Grey colour
Wire / Conductor Size (Min)	1.25 mm <sup>2</sup> min
Wire / Conductor Size (Max)	2.5 mm <sup>2</sup>
Height	161 mm
Width	24.5 mm
Depth	60 mm
Standards Compliance	IEC 61058-1

#### REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-