

Ordering Information

Code	Description	Product Number	Power	Carton Qty.	Weight (Net/ Gross)
5001	EV-BOXiT-24M-WALL	9336462050019	2.3W	4	5.19 Kg / 5.84 Kg

Operational Information

General				Battery	
Voltage (V)	220-240V	Viewing Distance	24M	Battery Type	NI-MH
Frequency (Hz)	50	Classification	C0:E2 C90:E2 C180:C2	Battery Code	1938
Max. Ambient Temp.	50°C	Mounting Type	Wall		
Class	2	Lamp Code	N/A	Charger Type	Continuous
Wiring	16mm Terminals	IP Rating	IP20	Charging Time	16 Hours
		Duration	2 hours	Charger Operation	Trickle

Spacing Table (Distance Between Fittings)

(m)	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	15.0	20.0
C2 [0.2 Lux]	4.1	4.1	4.1	3.9	3.7	3.3	2.6									
C2 [0.5 Lux]	2.3	1.5														
C2 [1.0 Lux]																
E2 [0.2 Lux]	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0								
E2 [0.5 Lux]	3.1	2.0	1.0													
E2 [1.0 Lux]																

Compliance


Test Type	Laboratory	Test Report Number	Date of Issue
Temperature and Duration	Light Lab International	LL113402T	03/02/2012
Emergency Classification	Light lab International	LL15176	28/02/2012

Accessories and Spare Parts

Code	Description	Code	Description
1938	EV-MH3.6v 1200mAh (x3)	5014	EV-BOXiT-24M-R-MAN DECAL

Photometric Data

Gamma	C0	C22.5	C45	C67.5
0	2.307	2.307	2.307	2.307
10	2.745	2.794	2.635	2.47
20	3.645	3.689	3.22	2.756
30	4.581	4.585	3.914	3.022
40	5.315	5.344	4.482	3.218
50	5.914	5.914	4.923	3.29
60	6.277	6.256	5.192	3.325
70	6.425	6.367	5.232	3.19
80	6.328	6.368	5.162	3.064
90	6.29	6.246	5.066	2.899

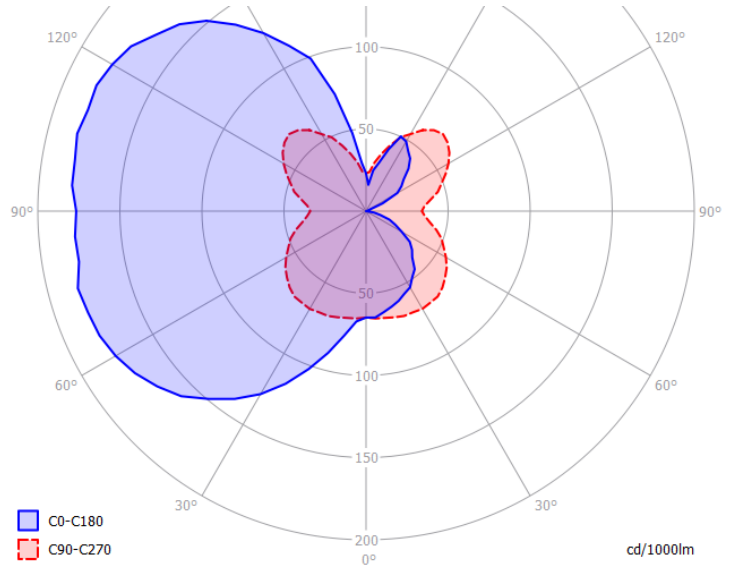


Construction and Dimensions

Body	PC	Gear Tray	PC
Diffuser	PC	Lens	PC
Cut Out	N/A		



375

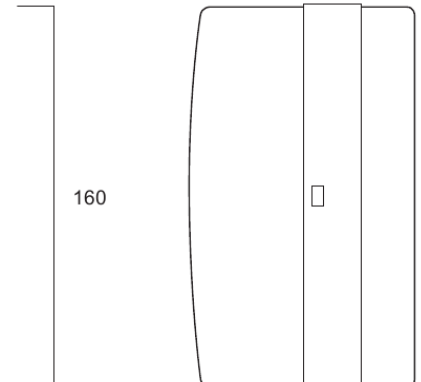

160

90