



AURORA 80

AURORA80A01

SAP CODE: 2000046

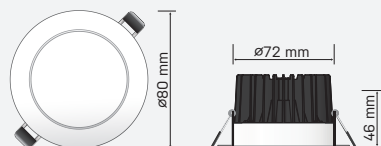

Photometric Diagram



Unit: cd
 - C0/180 85.0deg
 - C90/270 85.0deg

White trim, 3000k, flush diffuser, LED downlight

A compact fixed LED downlight with a flush opal diffuser that provides low glare lighting.

KEY INFORMATION

Lumen Output	540lm
Input Power	7W
Hole Cutout Size	Ø72mm
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-F
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	77lm/W
LED	SMD
CCT	3000K
CRI	>80
Beam Angle	86

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	22VDC
Power Factor	>0.9
LED Input Current (nominal)	250mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium ADC12
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.1m Flex & Plug
Total Weight	0.39kg
Dimensions	Ø80x46mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.