

PASSIVE

SPLITTERS

2 AMP RATED

SPLITTER 4 WAY F TYPE 5 ... 2400 MHz POWER PASSING ALL PORTS OUT-IN


Product Code: CAS4FA/MS

FOXTEL: F30986



FEATURES

- Splits the SMATV signal into four outputs for RF distribution
- Solder back body with high quality housing
- Earthing terminals included with wall mounting lugs built into the housing
- All legs power passing feature from the outputs to the input

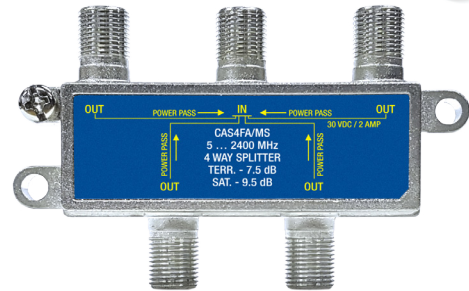

Specifications	Frequency (MHz)	CAS4FA/MS
Insertion Loss IN-OUT (dB)	5 ... 40	≤ 7.5
	40 ... 1000	≤ 8.5
	1000 ... 1750	≤ 9
	1750 ... 2050	≤ 9.5
	2050 ... 2400	≤ 9.5
Isolation OUT-OUT (dB)	5 ... 40	≥ 35
	40 ... 1000	≥ 30
	1000 ... 1750	≥ 30
	1750 ... 2050	≥ 28
	2050 ... 2400	≥ 25
Input Return Loss (dB)	5 ... 40	≥ 10
	40 ... 1000	≥ 10
	1000 ... 1750	≥ 10
	1750 ... 2050	≥ 10
	2050 ... 2400	≥ 10
Output Return Loss (dB)	5 ... 40	≥ 10
	40 ... 1000	≥ 10
	1000 ... 1750	≥ 10
	1750 ... 2050	≥ 10
	2050 ... 2400	≥ 10
Screening RF	5 ... 1000	≥ 75
Screening IF	1000 ... 2400	≥ 65
Impedance		75 Ω
Housing		Solder Shielded Bottom Plate
Mounting Screws		± PM 4 x 18 A3 Nickel-Plated, 2 pcs
Power Pass		All Ports OUT to IN, 30 VDC 2 Amp
Earthing Terminal		Yes