


# Catalogue No: CA7-9-10-220VAC

## CONTACTOR 4kW 3P 220V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7  
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

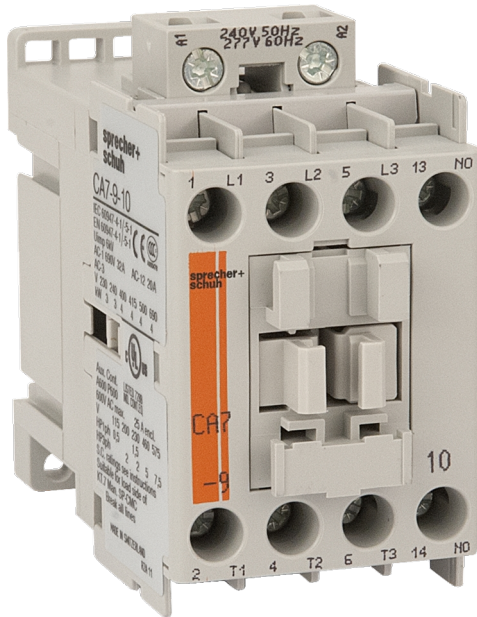

Contactor 3 pole 9A 4kW 1N/O Auxiliary 220V AC Coil

Representative Photo Only  
(actual product may vary based on configuration selections)

### SPECIFICATIONS

Product Series	CA7-09
Component Type Motor Control and Drives	Standard Contactor
I <sub>e</sub> , Rated Operational Current, AC-1, 415V, 40°C	32 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	4 kW @415V, 60°C
I <sub>e</sub> , Rated Operational Current, AC-3, 415V, 60°C	9 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	4 kW @690V, 60°C
I <sub>e</sub> , Rated Operational Current, AC-3, 690V, 60°C	5 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Contact Configuration, Auxiliary	1 NO auxiliary
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	2.7 VA 9.5
Coil Consumption Pickup VA AC coiled contactors	75 VA
Integrated Aux	1 N/O
Coil Voltage	220 V AC V
U <sub>n</sub> , Coil Voltage, AC @50Hz, Min	187 V AC min @50Hz
U <sub>n</sub> , Coil Voltage, AC @50Hz, Max	253 V AC max @50Hz
U <sub>n</sub> , Coil Voltage, AC @60Hz, Nom	260 V AC nom @60Hz
U <sub>n</sub> , Coil Voltage, AC @60Hz, Min	221 V AC min @60Hz
U <sub>n</sub> , Coil Voltage, AC @60Hz, Max	286 V AC max @60Hz
Tightening Torque, Power Terminals, max	2 Nm max
IP Rating	IP20

# Catalogue No: CA7-9-10-220VAC

## CONTACTOR 4kW 3P 220V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



### REFERENCES

IECEX Certificate -


Supplier Declaration of Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue & Product Selection: -

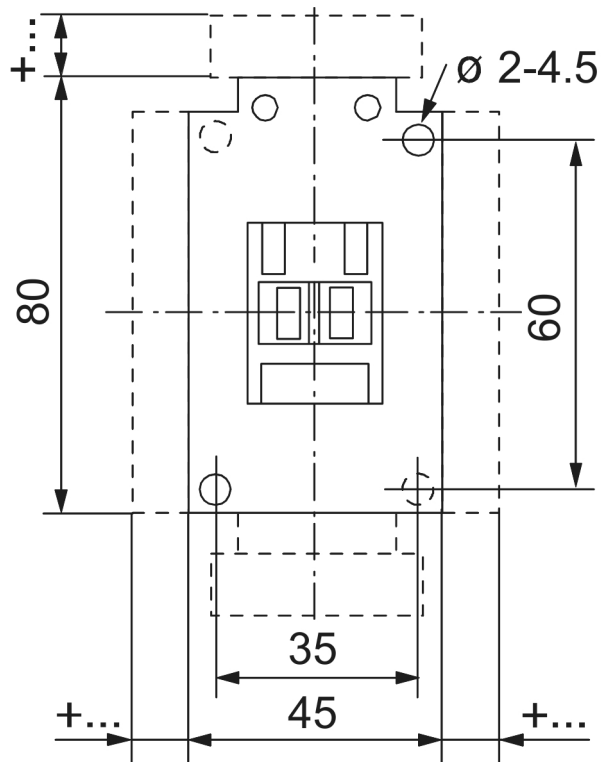

Dimension Diagram