


## Klixon - Hot Water Thermostat



Schematics

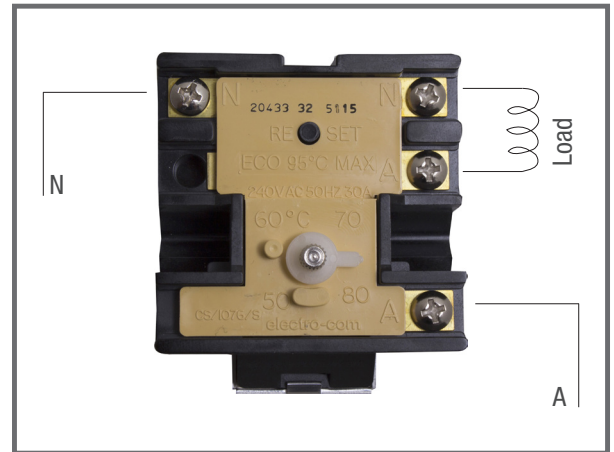

### Features:

- Adjustable temperature
- Single element control
- Manual reset overtemp protection
- SPST - Break on temperature rise
- Range: 60°C to 80°C
- Amperage: 30 Amps
- Differential: 10°C
- Application: Electric hot water storage systems

### Technical Specification:

- Electrical rating:
  - N.C. contacts - 30Amps, 240Volts, A.C.
  - N.O. contacts - N/A

### Ordering Information:

Part No. RSKL20433-3-1

**Warning:** To be only installed by a registered electrician. Isolate appliance before commencing service.

Proudly Distributed by System Control Engineering

AU T: 03 9877 3211 | E: sales@systemcontrol.com.au | W: systemcontrol.com.au

NZ T: 09 636 1401 | E: sales@systemcontrol.co.nz | W: systemcontrol.co.nz

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.