



DISCUS-III LED HIGHBAY

**Bright uniform light,
with high lumen
efficiency.**



**240V
AC**

**100W
15000lm**

21531

**150W
22500lm**

21532

**5000K
NATURAL
WHITE**

**120°
BEAM
SPREAD**



NON-
DIMMING

**IP65
WEATHER
RESISTANT**

**IK07
VANDAL
PROOF**



CLASS I (1)

**5YR
WARRANTY**

Discus-III LED Highbay lighting is the ideal answer for factories, stockrooms, supermarkets, gyms, petrol stations, warehouses, and other places that may need lighting. Designed for applications of 6 metres or more. With IP65 and IK07 ratings guarantee that these lights are waterproof and can be applied both indoors and outdoors.

- Black Diecast alloy housing with painted steel bracket.
- 304 stainless steel hook and external bolts.
- High lumen efficiency of 150lm/W LED SMD Arrays.
- Baldurs EUC driver with SAA approved 1.5m flex & plug.
- Includes 600mm stainless steel anti-drop safety cable with steel carabiner's.
- Instant start, no re-strike delays.
- Easy-install fitting for fast, effortless retro-fitting.
- 5 Year Replacement Warranty.

APPLICATIONS

- Factories, warehouse, workshop, assembly lines, indoor stadium, supermarket, shopping centres, school, hospital, laboratory, airport.
- Suitable for dry, damp and wet locations.





DISCUS-III LED HIGHBAY

TECHNICAL SPECIFICATIONS

Operating voltage:	240V / 50Hz
Class:	Class I (1)
Wattage:	100W Total (21531) 150W Total (21532)
Lumens:	15,000 Total lumens (21531) 22,500 Total lumens (21532)
Colour temperature:	5000°K (Natural white)
Beam angle:	120 degrees
Colour rendering index:	≥80
IP Rating:	IP65
IK Rating:	IK07 IK08 (When using 60 degree or 90 degree lens kit)
Dimmable:	No
Rated lifetime:	30,000 hours (Ta 25°C Ambient) 20,000 hours (Ta 50°C Ambient)**
Construction:	Aluminium (frame) Glass (diffuser)
Operating temperature:	Ta (Safety): 50° Celsius Max
Warranty:	5 year replacement
Standards:	AS/NZS 60598.1 AS/NZS 60598.2.2
Approvals	VEET: 8145 IPART: 17317S16-KHB2IHGD


**tested at high ambient to show the success of our thermally managed driver in maximising life expectancy in higher ambient temperatures

INSTALLATION

Must be installed by a licensed electrician

ACCESSORIES (sold separately)

60 Degree Lens	21534/07
90 Degree Lens	21535/07
Surface Mount Kit	21536/06

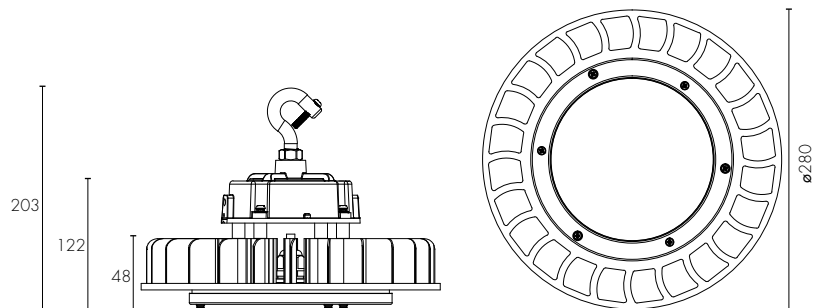

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	21531/06	Black	Discus-III 100W Highbay	W335 x H195 x D335 mm	3.1 kg	1 pc	9 312641 215318 >
RETAIL BOX	21532/06	Black	Discus-III 150W Highbay	W335 x H195 x D335 mm	3.1 kg	1 pc	9 312641 215325 >