

# PRODUCT DATASHEET

## HQI-TS 400 W/D

POWERSTAR HQI-TS | Metal halide lamps with quartz technology for enclosed luminaires



---

### AREAS OF APPLICATION

- Foyers, reception areas
- Factory and hall lighting with low-cost installations
- Exhibition halls and trade fairs
- Sports halls and multi-purpose halls
- Pedestrian zones, public squares
- Parks and gardens
- Buildings, monuments, bridges
- Approved only for use in enclosed luminaires
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- High efficiency
- Uniform distribution of light
- Good to excellent color rendering
- Long lifetime
- Hot restrike capable
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter

---

### PRODUCT FEATURES

- POWERSTAR quartz technology
- Light colors: warm white (WDL), neutral white (NDL), daylight (D)



**TECHNICAL DATA**

Electrical data

Nominal wattage	400.00 W
Rated wattage	400.00 W
Lamp current	4.0 A
PFC capacitor at 50 Hz	45 µF <sup>1)</sup>
Nominal voltage	118 V
Ignition voltage	4.0 / 25 kVp <sup>2)</sup>



<sup>1)</sup> At rated voltage and  $\cos \varphi \geq 0.9$

<sup>2)</sup> Minimum / Maximum

Photometrical data

Rated lamp efficacy (standard condition)	83 lm/W
Rated luminous flux	35 lm
Color rendering index Ra	93
Color temperature	5500 K
Light color	5500
Rated LLMF at 2,000 h	0.70
Rated LLMF at 4,000 h	0.60
Rated LLMF at 6,000 h	0.55
Rated LLMF at 8,000 h	0.52
Rated LLMF at 12,000 h	0.50
UV protection	Yes
Light color (designation)	Daylight
Luminous flux	35 lm

Dimensions & weight



Diameter	33.0 mm
Length	206.0 mm
Light center length (LCL)	103.0 mm

<b>Product weight</b>	88.00 g
-----------------------	---------

### Temperatures & operating conditions

<b>Maximum permitted outer bulb temperature</b>	750 °C
<b>Maximum permitted pinch temperature</b>	300 °C

### Lifespan

<b>Rated lamp survival factor at 2,000 h</b>	0.80
<b>Rated lamp survival factor at 4,000 h</b>	0.70
<b>Rated lamp survival factor at 6,000 h</b>	0.60
<b>Rated lamp survival factor at 8,000 h</b>	0.55
<b>Rated lamp survival factor at 12,000 h</b>	0.50
<b>Lifespan B50</b>	12000 h

### Additional product data

<b>Base (standard designation)</b>	Fc2
<b>Product remark</b>	With NAV control gear
<b>Design / version</b>	Clear
<b>Mercury content</b>	40.0 mg

### Capabilities

<b>Dimmable</b>	No
<b>Burning position</b>	p45
<b>Enclosed luminaire required</b>	Yes
<b>Hot restart</b>	Yes


### Certificates & standards

<b>Energy efficiency class</b>	A
<b>Energy efficiency class</b>	A
<b>Energy consumption</b>	462 kWh/1000h


### Country-specific categorizations

<b>ILCOS</b>	MD/UB-400/856-H/E/SL-Fc2-25/162/H
--------------	-----------------------------------

Light Distribution

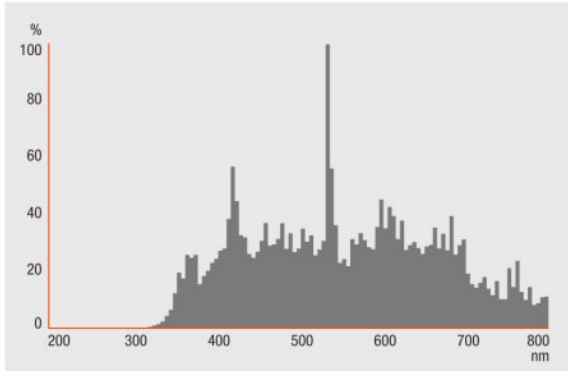

Spectral power distribution



Circuit diagram

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321689191	HQI-TS 400 W/D	Shipping carton box 12	216 mm x 166 mm x 272 mm	9.75 dm <sup>3</sup>	1464.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.