



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.


Part No: MCT7031S

Description	Stranded 20AWG PACW, Single Triad, V-90HT PVC Insulated, Aluminium Polyester Overall Screen, TACW 22AWG Drain Wire, 5V-90 PVC Sheath.
Applicable Standards	AS/NZS 1125 , AS/NZS 3808 , IEC60332-1
Suitable Applications	Instrument and control cable for use in industrial applications including the interconnection of signals between cabinets, consoles, sensors and display panels. Can also be used for carrying low bit rate data signals.
	Not suitable for direct connection to mains voltages.

Cable Construction Drawing



Cable Construction Relative Parts

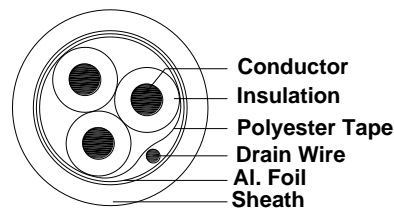

Cable Description

Conductor	AWG	Standing	Area(mm ²)	Diameter(mm)	Material
	20	7/0.30	0.5	0.9	PACW
Insulation	Triad : 1 Material : V-90HT PVC Colour : Black, White and Red wires form a triad. Triad nos. printed on each triad Nominal Thickness (mm) : 0.3 Nominal OD (mm) : 1.6				
Screen	Material: Al. Polyester Tape		Coverage: 100%		
Drain Wire	AWG	Standing	Area(mm ²)	Diameter(mm)	Material
	22	7/0.25	0.34	0.76	TACW

Instrumentation Cable

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

MCT7031S-150226.docx

made by





garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Sheath	Material : Colour : Nominal Thickness (mm) : Nominal OD (mm) :	5V-90 PVC Black 0.75 5.5
--------	---	-----------------------------------

Electrical Properties

Max. Conductor DC Resistance @ 20°C	38.4Ω/km
Min. Impedance @ 1KHz	380ohm
Nom. Mutual Capacitance @ 1KHz	85pF/m
Max. Inductance @ 1KHz	1.1μH/m
Max. Current Rating	3A
Suggest Voltage Rating	110a.c/150d.c

Mechanical Properties

Operating Temperature Range	-15 to 90°C
Max. Recommended Pulling Tension	104N
Min. Bend Radius (install)	55mm
Approximate Mass	4.5kg/100m
Sheath Printing	GARLAND 1TRIAD 0.5mm ² INSTRUMENTATION CABLE MCT7031S - MM/YYYY - "Mmark"

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
100m	Plastic Reel	10 x 4.5 x 3.5"	4R	
500m	Wooden Reel	W36 x H21.8cm	1R	

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

MCT7031S-150226.docx

made by

